


S.4512.19

With **SOFT WHITE LED 1,5W 240V**
CLASS II  
IP 67



RECESSING BOX

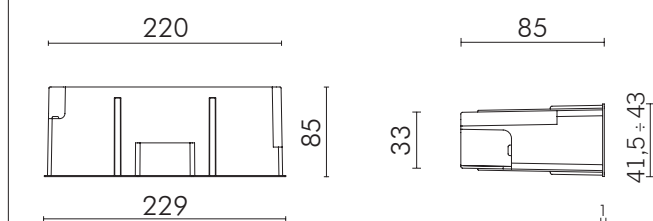

Stainless steel AISI 316L front trim 3 mm thick.
 Zinc alloy back-ring.
 Polycarbonate housing.
 Methacrylate projected diffuser.
 Luminaire supplied with cable.
 Recessing boxes for wall recessing included.
 LED RED, LED AMBER and LED GREEN versions available on request.
LED circuit included.
 IK 09 (12 Joule) impact.
 GLOW WIRE: 650°C

Colours:  Stainless steel (code 19)

ACCESSORIES



FAST CONNECTOR ACCESSORY S.5502

Fast connector M20 (Ø 5÷14 mm)
 IP68 for single through wiring.
 To be placed inside the recessed box.



RIGHELLO luminaire is supplied with two clips which allow an easy installation for floating walls and ceiling mounting.

NOTE: Wall thickness must be between 5 and 30 mm.

Hole ~~226~~ x 36 mm